



Schroefvormen en afmetingen

Pijpschroeven




Typ	PS 80	PS 100	PS 150	PS 200	PS 250	PS 300	PS 350	PS 400	PS 500	PS 600	PS 800
B (mm)	ø 88,9	ø 114,3	ø 168,3	ø 219,1	ø 273	ø 323,9	ø 355,6	ø 406	ø 508	ø 606,9	ø 812,8
ISO/ANSI	3 "	4 "	6 "	8 "	10 "	12 "	14 "	16 "	20 "	24 "	32 "

Dubbele pijpschroeven, zelfreinigend

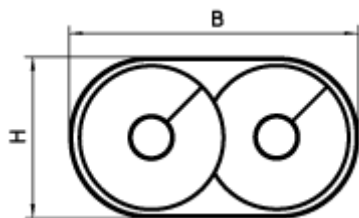


Typ	2-PS 80	2-PS 100	2-PS 150	2-PS 200	2-PS 250	2-PS 300	2-PS 350	2-PS 400	2-PS 500	2-PS 600	2-PS 800
B (mm)	149	187	285	385	483	578	628	728	920	1110	1512
H (mm)	89	115	169	220	278	328	358	416	520	622	832

Trog Schroeven




Typ	TS 125	TS 160	TS 200	TS 250	TS 315	TS 400	TS 500	TS 630	TS 800	TS 1000	TS 1250	TS 1500
B (mm)	140	180	220	270	335	425	525	660	830	1040	1290	1550




B is afhankelijk van de trechterafmeting

Dubbele Trogschroeven

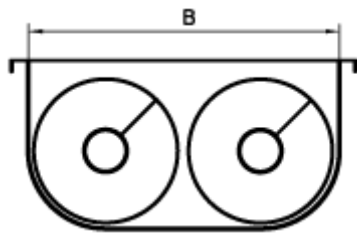


Typ	2-TS 125	2-TS 160	2-TS 200	2-TS 250	2-TS 315	2-TS 400	2-TS 500	2-TS 630	2-TS 800	2-TS 1000	2-TS 1250	2-TS 1500
B (mm)	290	360	445	545	685	875	1100	1374	1730	2160	2680	3220

Dubbele Trogschroeven, zelfreinigend




Typ	2-TS 125	2-TS 160	2-TS 200	2-TS 250	2-TS 315	2-TS 400	2-TS 500	2-TS 630	2-TS 800	2-TS 1000	2-TS 1250	2-TS 1500
B (mm)	245	310	380	470	595	740	940	1174	1514	1910	2400	2896

Meervoudige Trogschroeven (uitdraagbodems (live-bottoms))

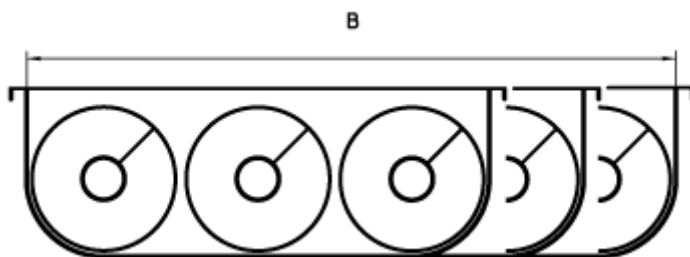

B is afhankelijk van de bunkerbreedte

Spiraalschroeven



Typ	U 180	U 220	U 270	U 335	U 425	U 525
B (mm)	180	220	270	335	425	525

Ook leverbaar als meervoudige transportschroef (uitdraagbodem (live Bottoms))